



# COMPONENTS

Dedicated Low Energy Lighting Solutions  
from **tp24**

For UK Distribution

tp24 Ltd, Seymour House, 12 Station Road, Chatteris, Cambridgeshire, PE16 6AG, UK  
Tel +44 (0)1354 694591 Fax +44 (0)1354 695879 E-mail [sales@tp24.com](mailto:sales@tp24.com) Website [www.tp24.com](http://www.tp24.com)

# L1 Lamp Holders




2322  
push fit lamp holder

We offer a variety of different lamp holders, suitable for any situation. They all come with a choice of wire length.




2323  
push fit  
threaded lamp holder

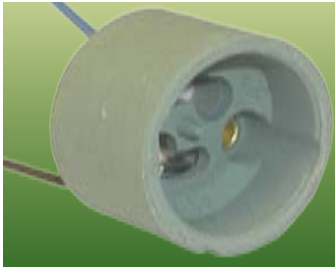


2320  
pre-wired lamp holder



2321  
pre-wired  
threaded lamp holder

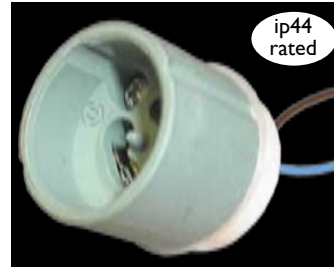

2324  
ip44 lamp holder with  
threaded entry - plain

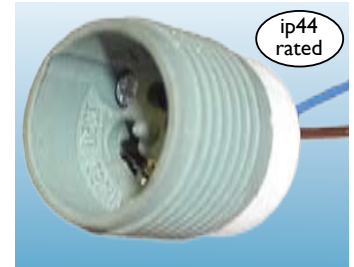

2325  
ip44 lamp holder with  
threaded entry - threaded

# L1 Sundries



# L-1 Lamps



tp24 - 2310




tp24 - 2313



tp24 - 2315



tp24 - 2317

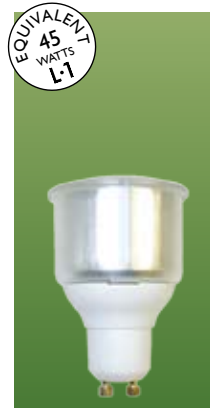

tp24 - 2318



tp24 - 2319

Code No.	Type	Voltage (v)	Watts (w)	Lumen	Colour Temp (K)	Life Time (h)	Overall Length (mm)	Max Width (mm)	RoHS	CE	EU Energy Rating	Watertight Lamp	Integrated Electronic Start
tp24 - 2310	L-1 Candle	220/240	9	405	2700K warm white	8,000	105	39	✓	✓	A	✓	✓
tp24 - 2313	L-1 Micro	220/240	9	405	2700K warm white	8,000	78	48	✓	✓	A	✗	✓
tp24 - 2315	L-1 GLS	220/240	15	820	2700K warm white	8,000	130	65	✓	✓	A	✗	✓
tp24 - 2317	L-1 Tube	220/240	9	450	2700K warm white	8,000	136	32	✓	✓	A	✓	✓
tp24 - 2318	L-1 Spot	220/240	11	300*/475**	2700K warm white	10,000	76	50	✓	✓	B	✗	✓
tp24 - 2319	L-1 Spot IP	220/240	11	300*/475**	2700K warm white	10,000	76	50	✓	✓	B	✓	✓

\* Measured in sphere with reflector \*\* Measured in sphere without reflector